Hazardous Waste Compliance Workbook

For

Rhode Island Generators





March, 2002

State of Rhode Island
Department of Environmental Management
Office of Technical and Customer Assistance

Table of Contents

1.0 Ove	rview	3
1.	Pollution Prevention	3
1.3	2 Top Ten Tips for Environmental Success	5
1.3	3 Other Important Regulatory Responsibilities	7
2.0 Haza	ardous Waste Management	10
2.	1 Waste I dentification	10
2.	2 Waste Accumulation/Storage Time Limit	15
2.	3 Waste Storage – Containers/Containment	17
2.	4 Waste Storage – Tank Systems	25
2.	5 Container Labeling Requirements	26
2.	6 Offering Waste for Shipment - Licensed Transporters,	
	EPA ID Numbers and Waste Manifests	28
2.	7 Emergency Preparedness and Prevention/	
	Contingency Plans	32
2.	8 Annual Personnel Training	34
2.	9 Recordkeeping and Reporting	36
3.0 Haza	ardous Waste Self-Audit Checklist	39
4.0 I mp	ortant Phone Numbers	41
5.0 App	endices	
A	opendix A – Commercial Haz. Waste Storage Lockers	42
A	opendix B - Examples of Potentially Incompatible Wastes	43
A	ppendix C - DOT Hazard Labels & DOT Hazard Placards	46
A	opendix D – Licensed Hazardous Waste Transporters	48
Α	ppendix E - Contingency Plan Development Guidance	52

This report is intended as advisory guidance only in developing approaches for pollution prevention and environmental compliance. Any and all products and companies identified (through the manufacturer's supplied product literature) in this report are for example only. No endorsements are implied nor should any be inferred. The Office of Technical and Customer Assistance advises that prior to implementation of any suggestion or recommendation, the company should consult with proper Federal, State, and Local regulatory agencies. This workbook does <u>not</u> replace the RI Rules and Regulations for Hazardous Waste. The RI Regulations are the basis of any compliance or enforcement issues.

Questions and/or Comments can be directed to:

State of Rhode I sland Department of Environmental Management Office of Technical and Customer Assistance
235 Promenade Street

Providence, RI 02908-5767 (401) 222-6822

Note: This workbook is a public document and is not copyrighted. It may be reproduced for educational purposes, but may not be sold for profit.

Section 1.0 - Overview

In 1976, the U.S. Congress passed the Resource Conservation and Recovery Act (RCRA) to develop and implement a program to protect human health and the environment from improper solid and hazardous waste management practices. Hazardous waste includes materials that you intend to discard and which have been designated as hazardous to public health and the environment when not handled properly. This workbook provides guidance on how to identify and properly manage hazardous wastes at your site. Hazardous wastes have special storage, handling, labeling, emergency planning, and training requirements which are detailed in this workbook.

What types of businesses are likely to produce hazardous wastes?

- automobile maintenance and body shops
- electroplaters and metal fabricators or finishers
- printers
- photographic and x-ray processors
- dry cleaners
- chemical laboratories (including schools and universities)
- furniture manufacturers and strippers
- construction
- pest control
- chemical manufacturing
- textile manufacturing
- funeral services

1.1 Pollution Prevention (P2) - The First Step to Compliance

The first step on the road to environmental compliance is to look for opportunities to use fewer hazardous materials and to generate less waste, thus stopping pollution at its source

P2

to generate less waste, thus stopping pollution at its source. Why manage wastes when you can eliminate them? Pollution prevention techniques can help you reduce your compliance burdens, make your workplace cleaner and safer, increase your competitiveness and save you money. This section outlines some easy first steps for you to take to prevent pollution. After taking these steps and reducing your use of toxic materials and generation of wastes as

much as you can, move along in the workbook to find out how to properly manage your remaining wastes. If you need help with implementing pollution prevention techniques/technologies, feel free to contact us at DEM's Office of Technical and Customer Assistance (OTCA) at (401) 222-6822.

All Generators Should:

 Make one person (or a person in each department) solely responsible for chemical purchases and inventory control. Consider environmental and safety requirements in purchase decisions. Store chemicals in a central location.



- Conduct an annual inventory to reduce the number of chemical products used in the shop.
- Track chemical use and wastes to identify opportunities to both reduce waste and use less toxic alternatives.
- Implement best management practices for the storage and handling of stock and materials. Spoiled and obsolete materials should be removed. Use first-in, first-out management practices.
- Examine your use of materials by process. Are there new technologies that can replace your existing process and reduce toxics or waste? You may also be able to save money or provide a new customer service.
- Clean containers as much as practical. Recycle the used containers or return them to the supplier or a drum reconditioner.
- Give employees simple incentives to keep their work areas clean and minimize chemical use. Promote good housekeeping.
- Consider purchasing recycling equipment to allow your shop to reuse materials such as solvents and washwaters.

1.2 Top Ten Tips for Environmental Success

- 1. Pollution Prevention Your first step to compliance.

 P2 techniques should be used wherever possible to reduce wastes and emissions. Look for opportunities in your shop to employ pollution prevention techniques. If you need help with identifying or implementing pollution prevention techniques/technologies, feel free to contact OTCA at (401) 222-6822.
- 2. Actively and Aggressively Manage your Wastes. Hazardous wastes should never be handled like regular trash, nor should they be disposed of in the regular trash. As a generator, you are responsible for the waste's identification and disposal. Accumulate these wastes in appropriate containers for proper disposal. There are also storage, labeling, emergency planning, and employee training requirements which are described in this manual. Also, non-hazardous materials such as cardboard, aluminum, paper, and scrap metal are recyclable. Feel free to contact OTCA for assistance with material identification, disposal and recycling.
- 3. Shop Towels Should Not be Used for Waste Disposal. You should reduce the amount of material on your shop towels as much as possible. Shop towels saturated (dripping) with liquids that are considered hazardous wastes (such as solvents), must be handled as hazardous wastes. Towels with only minor contamination must also be handled as hazardous waste unless they are sent off-site for laundering at a properly licensed commercial laundry.
- 4. Hazardous Waste Management To Manage is to Control. Nothing can get you into trouble faster than a disorganized waste storage area. Label drums and keep them clean and closed. Maintain aisle space, post warning signs, and keep hazardous wastes separated from non-hazardous wastes and virgin materials. Storage areas have specific requirements regarding 90 day storage time limits, condition of containers, secondary containment and storage area inspection. These requirements can be found in Section 2.2.

- 5. Prevent Trouble Plan for Emergencies and Train Employees. You must have emergency response procedures and equipment in place to ensure employee safety, along with a written plan known as a contingency plan. Post emergency phone numbers at each phone near the work areas. Designate an emergency coordinator and instruct employees on whom to contact and what to do during a spill or evacuation. Employees which handle or are otherwise involved with hazardous wastes must be trained annually in the proper procedures for safe handling of these materials. Further information can be found in Section 2.7-2.8.
- 6. Records, Records. You must keep your material purchase or usage records, hazardous waste manifests, material safety data sheets (MSDSs), and other legally required records on file. The regulations generally require that you keep these records for at least three years, but it is good management practice to keep these records indefinitely.
- 7. Internal Review Continual Improvement. Good environmental management does not end with a one-time review of your shop. Periodic reviews of your chemical usage can identify trends and problems which can help you minimize wastes even if you are a small business. Regular meetings with employees to review these issues help begin a culture of environmental awareness which can save you headaches and possibly fines down the road. Consider providing incentives for employees who minimize chemical use and use personal protective equipment.
- 8. What to Expect from an Inspection. DEM's Office of Compliance and Inspection periodically and randomly inspects generators of hazardous waste. During an inspection, DEM officials look for company personnel to demonstrate a knowledge of the hazardous waste regulations as well as a knowledge of all waste management practices in use at the facility. Personnel must be able to defend their waste management practices using records such as hazardous waste shipment manifests, laboratory analyses, and training records.
- 9. Most Common Difficulties/Violations found by DEM. During inspections, DEM officials commonly find violations such as: lack of overall understanding of the regulations, lack of appropriate identification of wastes with supporting analyses or process knowledge, lack of

understanding of the satellite accumulation requirements, lack of understanding of the 90-day storage area and container requirements, lack of a written contingency plan, and lack of training and training documentation.

The Rhode Island Environmental Compliance Incentive Act. The 10. Rhode Island Environmental Compliance Incentive Act was created to encourage regulated entities to perform voluntary self-evaluations of their compliance programs and management systems, and to thereby improve compliance with such statutes and/or regulations without fear of retaliation. If a regulated entity satisfies the conditions set forth in Sections 42-17.8-4 through 7 of the Act, the Department shall not: (1) assess gravity-based penalties for any violation of environmental laws reported by the regulated entity; (2) refer the regulated entity to the attorney general or other governmental authority for civil or criminal prosecution related to the violation(s) disclosed by the regulated entity; and (3) request or use a regulated entity's environmental audit report(s) as a regular means of investigation or as a basis for initiating administrative, civil, or criminal actions. As you audit your facility using this workbook, be sure to consider using the Act to your benefit. Contact OTCA at (401) 222-6822 if you have any questions regarding the Act.

1.3 Other Important Regulatory Responsibilities

Rhode I sland businesses are responsible for all environmental impacts that the facility may have. Though this workbook covers only hazardous waste issues, you must be aware of other issues commonly found in facilities.

Air Emissions: Air emissions occur when air contaminants are discharged to the ambient environment. An air contaminant is any substance released to the air which includes sanding dusts, paint fumes, mists, odors, smoke, or combinations of these. One particular type of air contaminant common to many shops are volatile organic compounds (VOCs), which are generated when solvents, such as thinners, inks, and paints, evaporate into the air. VOCs play a major role in the formation of ground-level ozone (otherwise known as

"smog"). If you have any questions regarding permitting thresholds or other air pollution issues, feel free to contact OTCA at (401) 222-6822.

Industrial Wastewater Discharge: Industrial wastewater is any wastewater resulting from an industrial or manufacturing process, trade or business. Discharge is the release of the industrial wastewater into the waters of the State through pipes, sewers, or other means. Industrial wastewater requires permitting through a local sewer authority or the DEM depending on the discharge point. Stormwater issues apply as well. If you have any questions regarding your permitting authority or discharge limitations, feel free to contact OTCA at (401) 222-6822.

Worker Health and Safety: The Federal Occupational Safety and Health Administration (OSHA) regulates health and safety in the workplace. Issues such as chemical exposure, hazard communication, respiratory protection, lockout/tagout, hearing protection, personal protective equipment, forklift operation, confined space entry, bloodborne pathogens, and emergency action plans are all strictly regulated by OSHA. The Rhode I sland Department of Health provides compliance assistance in these areas. Should you need help, contact the OSHA consultative branch at (401) 222-2438.

Underground and Aboveground Storage Tanks: DEM has specific regulations associated with both underground and above ground storage tanks. These include provisions for corrosion protection, testing, secondary containment, release prevention, and safety. These regulations are specific to the type of tank and its contents. Contact OTCA for more information. In general, aboveground tanks containing over 500 gallons of petroleum should have overfill protection and a secondary containment system. Stormwater needs to be kept out of the secondary containment, or it may overflow in the event of a spill from the primary container. A Spill Prevention, Control and Countermeasure (SPCC) Plan is needed for facilities that store over 660 gallons of petroleum (products or waste) in any one aboveground tank (or, in Rhode Island, over 500 gallons in a tank stored aboveground outdoors), or over 1320 gallons total of petroleum aboveground across the whole facility, where a spill could be reasonably expected to reach a water body or wetland, via a storm drain or other drainage pattern.

Floor drains in industrial facilities that discharge to a Floor Drains: waterway or below the ground via a dry well, septic system, galley or other means, are strictly regulated and sometimes prohibited. Entities should know where their wastewater goes. If existing floor drains are connected to the local sewer system, you should be aware that sewer connections are subject to local permitting. If floor drains are connected to an underground tank, underground tanks are subject to permitting through the DEM Underground Storage Tank Program. If the floor drains discharge below ground, this discharge to the subsurface (underground through a drywell, galley, or other means) requires permitting through DEM's Underground Injection Control Program. Closure of existing floor drains requires proper procedures and must be undertaken in conjunction with DEM's Underground Injection Control Program. Be sure to contact the UIC program when closing floor drains that discharge to the subsurface. Contact OTCA for more information on this topic.

Wetlands: Wetlands harbor specific species of plants and animals, help prevent flooding by absorbing heavy rains, and can clean rainwater and runoff water of pollution before it flows into streams and rivers. Because of the wetland's value to the environment, state regulations require any plans for construction near a wetland (wetland setbacks range from 50 to 200 feet) to be reviewed by the Department of Environmental Management. If you are planning construction or expansion at your site, be sure to contact DEM if wetlands are present.

Section 2.0 - Hazardous Waste Management

As a business owner, you must manage your hazardous wastes in a safe and environmentally responsible manner. Federal and State regulations place the burden on you, as the generator, to properly dispose of the waste. The generator has "cradle-to-grave" responsibility, i.e., you retain responsibility



even when other companies handle and dispose of your waste. By choosing products that are less hazardous, and minimizing the amount that you generate, you reduce your cradle-to-grave liability. This section describes the rules and regulations for hazardous waste management.

2.1 Waste I dentification

Your business probably generates hazardous waste if you use:

- flammable materials,
- solvents, hydrocarbon-based cleaning materials or thinners,
- printing inks, paints, or dyes,
- photoprocessing materials,
- materials that dissolve metals, wood, paper, cloth, or paint,
- materials that burn or itch when in contact with skin,
- materials that bubble or fume when in contact with water.

A common misconception regarding the hazardous waste regulations involves the definition of wastes vs. raw materials. Materials that you are using or intend to use are not considered a waste, and thus are not subject to the hazardous waste regulations. (Raw materials with health/safety hazards are regulated under OSHA Hazard Communication requirements, Personal Protective Equipment requirements, etc., and may even be subject to local regulations or fire codes.) As such, raw materials should be stored separately and not confused with waste materials. However, materials that are expired or that you do not intend to use anymore may automatically become wastes, and must be managed as such.



Waste materials (solid and liquid) are determined to be hazardous wastes because:

- They are <u>listed</u> by the U.S. Environmental Protection Agency in 40 CFR 261 Subpart D (a listed waste). (Note that some wastes are defined as "acutely hazardous waste" and therefore the quantity which can be temporarily stored on-site is limited. Section 2.2 provides more information)
- 2. They demonstrate a <u>characteristic</u> of a hazardous waste as detailed in 40 CFR 261 Subpart C (a characteristic waste). The four characteristics are ignitability, corrosivity, reactivity, and toxicity.
- 3. They meet the description of a Rhode I sland Hazardous Waste as listed in Section 3.67 of the Rhode I sland Rules and Regulations for Hazardous Waste Management. Use the Federal definitions first, then use the State's, if the Federal definitions do not apply. Do not mix the Federal with the State's definitions.

Note: The RI Regulations frequently refer to the Code of Federal Regulations for Protection of Environment (40 CFR) which can be obtained free of charge through the Internet at http://www.access.gpo.gov/nara/cfr/index.html. 40 CFR 262 details standards applicable to generators of hazardous wastes. OTCA attempts to identify sections of both the state and federal regulations which apply to the facility and these are included with this workbook. But, it is ultimately the generator's responsibility to read, understand, and comply with these regulations.

As a generator, you are required to determine if your waste falls into any of these three categories. You can do this by using your knowledge of the process and materials, including available information like MSDSs, or by testing a representative waste sample. Your waste disposal facility or environmental lab can help you characterize your waste for proper disposal. But, it remains the generator's responsibility to properly characterize its wastes. Note also that testing must be carried out using approved methods which are set forth in 40 CFR 260.11 or 40 CFR 261 Subpart C. If changes in your materials or process cause your waste to change, then you are required

to reevaluate it to ensure proper handling and disposal. Some transporters and disposal facilities may also require you to reevaluate your wastes each year. You must keep records of waste analyses to confirm your identification of wastes.

Check for Exclusions

Some of the materials that would otherwise fit the definition of a solid or hazardous waste under hazardous waste identification are specifically excluded from the definition. EPA concluded that these materials should not be regulated as solid or hazardous waste for one or more of a number of reasons. These exceptions and exclusions are found in 40 CFR 261.4. Items of interest to RI industries include:

- Reclamation in Enclosed Tanks [40 CFR 261.4(a)(8)],
- Spent Wood Preservatives [40 CFR 261.4(a)(9)],
- Excluded Scrap Metal [40 CFR 261.4(a)(13)],
- Shredded Circuit Boards [40 CFR 261.4(a)(14)],
- Used Oil Filters [40 CFR 261.4(b)(13)],
- Waste Characterization Samples [40 CFR 261.4(d)], and
- Treatability Study Samples [40 CFR 261.4(e) and (f)].

If you as the generator determine that your waste meets any of these exemptions or exclusions, the hazardous waste regulations do not apply. If you have a question regarding exclusions, contact OTCA at (401) 222-6822.

Universal Wastes

The following commonly-generated wastes are considered universal wastes and thus are not fully regulated as hazardous wastes. Universal wastes are described in Rule 13.00 of the RI Rules and Regulations for Hazardous Waste Management, and include the following materials:

- A. Batteries (as described in 40 CFR 273.2);
- B. Pesticides (as described in 40 CFR 273.3);
- C. Thermostats (as described in 40 CFR 273.4);
- D. Cathode Ray Tubes , including the display devices containing the cathode ray tubes (as described in Rule 13.02 of the RI Haz. Waste Regulations);

- E. Mercury-containing devices (as described in Rule 13.03 of the RI Haz. Waste Regulations), and;
- F. Mercury-containing lamps (as described in Rule 13.04 of the RI Haz. Waste Regulations).

Universal waste generators <u>are not</u> subject to the requirements of 40 CFR 264 and 40 CFR 265 when handling these wastes, but <u>are</u> subject to Rule 13.00 of the Hazardous Waste Regulations and 40 CFR 273. Universal wastes thus are not fully regulated as hazardous wastes. I tems such as storage time limits and storage area requirements are relaxed for universal waste. Refer to Section 13.00 of the Hazardous Waste Regulations for more specific information. A fact sheet describing these requirements is also available. Contact OTCA at 222-6822 to obtain a copy.

Common Hazardous Wastes

The following commonly-generated waste materials should be investigated for characterization as a hazardous waste (they are provided for example and should not be considered an all-encompassing list):

- -waste automotive fluids,
- -waste solvents and thinners,
- -waste machining oils, coolants, and hydraulic fluids,
- -waste paint (unused or expired paint),
- -sludge or "bottoms" from a solvent recycling unit (still),
- -waste methylene chloride paint stripper and sludge,
- -sludge from a wastewater treatment system at an electroplating shop.

Table 1 is provided to help you characterize your wastes. It also provides the proper waste codes which are required for drum labeling and for inclusion on the shipping manifest (both described in later sections). This table is for example only and should not be considered an all-encompassing list. It is provided only to demonstrate the thought process used for waste characterization. The full definition of a characteristic (Subpart C) waste and the Subpart D list can be found in 40 CFR 261. Should you need assistance in characterizing your wastes, feel free to contact OTCA at (401) 222-6822.

Federal vs. State Requirements for "Small Quantity Generators"

The Rhode Island Rules and Regulations for Hazardous Waste Management apply to all generators of Hazardous Waste. Rhode Island does not recognize federal exemptions for small quantity generators (less than 1000 kg of waste per month). The federal small quantity generator provisions are found in 40 CFR 261.5, 262.20(e), 262.42(b), and 262.44. If your facility generates any amount of hazardous waste, the Regulations apply to your facility. [Note that there are limited provisions for tank storage and biennial reporting. They are described where appropriate in this workbook, and in Rules 5.02(B) and (C), Rules 5.05, 5.06, and 13.06(B).]

Table 1: Hazardous Waste Identification Assistance

Waste	Is it Hazardous? Listed or Characteristic?	Why?	Waste Code
Sludge from a wastewater treatment system at an electroplating shop	Yes, a listed waste	Sludge from a wastewater treatment system at an electroplating shop is a listed waste. (See Section 2.2 for specific information about this waste.)	Listed: F006
Solvent/Paint Thinners	Yes, a listed & characteristic (ignitable) waste	Solvent blends are listed based on contents before use. The mixture may also have a flash point below 140°F	Listed: F003, F005 Char: D001
Sludge or "Bottoms" from Solvent Recycler or "Still", which Recycles Gun Cleaner or Thinner	Yes, a listed & possibly characteristic(ignitable) waste	Still bottoms from a still where the solvent blend contained, before use, ten percent or more of solvents such as xylene, toluene, and acetone. The mixture <i>may</i> also have a flash point below 140° F	Listed: F003, F005 Char: D001
Waste Methylene Chloride Paint Stripper	Yes, a listed & characteristic (ignitable) waste	The solvent blend contained, before use, ten percent or more of solvents such as methylene chloride, xylene, toluene, and acetone. The mixture may also have a flash point below 140° F	Listed: F002, F003, F005 Char: D001
Waste or Expired oil- (solvent-) Based Paint	Yes, a characteristic waste, and it <i>may</i> be a RI Haz. Waste	Waste paints will exhibit the characteristic of ignitability as defined in the Federal Regulations if they have a flash point below 140° F, and would carry the waste code D001. If waste paints exhibit a flash point between 73° F and 200° F, they would be characterized as a Slightly Flammable Waste under RI Regs., and would carry the waste code R003.	D001 or R003

Waste	Is it Hazardous? Listed or Characteristic?	Why?	Waste Code
Spent cyanide-based plating solution	Yes, a listed waste	Spent cyanide bath plating solutions are listed.	Listed: F007
Sludge or bottoms cleaned from plating tanks where cyanides are used	Yes, a listed waste	Sludge or bottoms cleaned from plating tanks where cyanides are used are listed wastes.	Listed: F008
Waste Motor Oil	Yes, it may be a characteristic waste, and it may be a RI Haz. Waste	Waste oil may have levels of lead and/or benzene which fails the toxicity characteristic. If shop chooses <i>not</i> to test, it must be handled as a RI Haz. Waste.	Waste code depends on the trace materials found through testing, or will be R010 if defined as a RI Haz. Waste
Waste Anti-Freeze	No	It does not meet any of the definitions.	
Absorbent Materials, such as Speedi-Dry, Contaminated with Haz. Waste	Yes, a characteristic waste	Absorbents soaked with materials that are considered hazardous waste also are considered hazardous waste.	Waste code depends on materials absorbed.
Shop Towels/Rags Contaminated with Haz. Waste	Yes a characteristic waste <i>(unless)</i>	Absorbents soaked with materials that are considered hazardous waste also are considered hazardous waste. But, in the case of rags/towels, if they are not soaked (dripping) and they meet the following conditions, they are not considered hazardous waste: 1.) They must be laundered at an appropriate facility, 2.) They must be stored in containers away from a source of ignition, 3.) No other waste can be mixed with rags.	Waste code depends on materials absorbed.

2.2 Waste Accumulation / Storage Time Limit

A generator may accumulate hazardous waste onsite for 90 days provided that the waste is placed in:

- 1. Containers,
- 2. Tanks,
- 3. Drip Pads, or
- 4. Containment Buildings.



Containers (drums) are, by far, the most common method of hazardous waste storage in Rhode I sland. If containers are used, they must be managed according to 40 CFR 265 Subpart I - Use and Management of Containers.

Subpart I lists seven criteria for proper container management and these are detailed in Section 2.3 - Hazardous Waste Storage - Containers. You can also accumulate up to 55 gallons of waste (or 1 quart of acutely hazardous waste) in containers according to the "Satellite" Accumulation provisions described below. If your waste is stored in tanks, it must be managed according to 40 CFR 265 Subpart J - Tank Systems. These criteria are listed in Section 2.4 Hazardous Waste Storage - Tank Systems. Drip pads and containment buildings are not common and are not described in this workbook. If you need information on requirements for drip pads or containment buildings, feel free to contact OTCA at (401) 222-6822.

"Satellite" or Workstation Accumulation

The State and Federal Hazardous Waste Regulations (specifically Rule 5.02(A), and 40 CFR 262.34(c)(1)) allow a generator to accumulate up to 55 gallons of hazardous waste (or 1 quart of acutely hazardous waste) with no storage time limit provided that the container is:

- 1. At or near any point of generation where the waste initially accumulates:
- 2. Under control of the operator of the process generating the waste;
- 3. In good condition;
- 4. Kept closed except when adding or removing waste;
- 5. Handled or stored so as not to cause a rupture or leak;
- 6. Arranged to accommodate the storage of chemically incompatible wastes; and
- 7. Labeled with the words "Hazardous Waste," and other words that identify the contents of the container.

When filled, the generator must move the 55-gallon container to a designated hazardous waste storage area within 3 days. The full containers then incur the 90-day time limit for proper disposition (i.e. the 90-day "clock" begins ticking) and must also meet the complete labeling requirements described in Section 2.5 – Container Labeling.

Extended Accumulation Periods for Wastewater Treatment Sludges from Electroplating Operations (F006 Sludge)


Wastewater treatment sludges from electroplating operations, (otherwise known as F006 waste) may be accumulated for 180 days under Rule 5.02(D) of the RI Hazardous Waste Regulations provided that:

- 1. The generator has implemented pollution prevention practices that reduce the amount of any hazardous substances, pollutants or contaminants entering the sludge or otherwise released to the environment prior to its recycling;
- 2. The F006 waste is legitimately recycled through metals recovery (i.e., on-site or off-site recovery of distinct metal component(s) from the electroplating sludge, as separate end product(s));
- 3. No more than 20,000 kilograms (44,000 pounds) of F006 waste is accumulated on-site at any one time;
- 4. The generator complies with proper storage and labeling requirements and all the provisions of Rule 5.02(D)(4) of the RI Regulations.

2.3 Waste Storage -Containers/ Containment

2.3.1 Containers

As described in the previous section, a generator may accumulate hazardous waste on-site for 90 days provided that the waste is placed in containers and these containers are managed according to 40 CFR 265 Subpart I - Use and Management of Containers. Subpart I lists seven criteria for proper container management. These

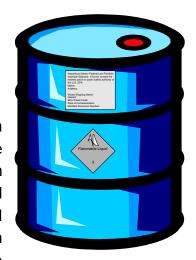

criteria are listed below with specific references to actions that shops can take to remain in compliance.

1. Condition of containers. § 265.171 -If a container holding hazardous waste is not in good condition, or if it begins to leak, the owner or operator must transfer

the hazardous waste from this container to a container that is in good condition, or manage the waste in some other way that complies with the requirements of this part.

Generators should review the condition of their containers and ensure that the facility and employees are capable of containing a leak. Spill kits are readily available and should be considered. Salvage drums (drums which can be used to house an entire leaking drum) are an additional safety feature to consider for your site.

2. Compatibility of waste with container. § 265.172 -The owner or operator must use a container made of or lined with materials which will not react with, and are otherwise compatible with, the hazardous waste to be stored, so that the ability of the container to contain the waste is not impaired.

Steel and plastic drums are generally used most frequently. Plastic drums are <u>not</u> compatible with solvents found in paints, paint thinners, cleaners, and strippers, so make sure that you are using steel drums for these fluids. Also, since these fluids are ignitable, you should be sure these drums are electrically grounded.

3. Management of containers. § 265.173 -(a) A container holding hazardous waste must always be closed during storage, except when it is necessary to add or remove waste. (b) A container holding hazardous waste must not be opened, handled, or stored in a manner which may rupture the container or cause it to leak.

Facilities should ensure that containers are closed except when it is necessary to add or remove waste. I tems such as funnels with lids, or simply securing the drum cap (bung), etc. can be used. Consider posting instructions in the area.

Also, drums of material are sometimes observed stored in areas outside the facility or in far corners of the property. Outdoor storage is generally not recommended. Generators should consider moving containers inside. If left outdoors, shops should protect the storage area from the movement of cars/trucks within the yard. A storage shed or a fenced and covered area should be considered. Commercially available hazardous waste storage lockers are another option. A list of locker manufacturers is included in Appendix A.

4. **Inspections. § 265.174** -The owner or operator must inspect areas where containers are stored, at least weekly, looking for leaks and for deterioration caused by corrosion or other factors. [Comment: See § 265.171 for remedial action required if deterioration or leaks are detected.]

Generators should implement a weekly inspection of the storage area looking for leaks or deterioration of hazardous waste containers. This program must be documented. Consider hanging a clipboard on the wall with the checklist and inspection log. Included on the following page is a checklist of items for your use to perform the inspection. Record this inspection in an inspection log and keep these records for at least three (3) years from the date of inspection.

Hazardous Waste Storage Area Inspection Checklist

Weekly Inspection Checklist and Record fo	r (shop name)
Name/Title of Inspector:Date and	Time of Inspection:
Area(s) Inspected:Number of	of Full Containers:
Are All Containers Closed:	
Condition of Containers:	ration due to rust? Have containers been
Condition/Integrity of Containment Area:	erms or other containment device deteriorated
Is there sufficient aisle space between rows of dru (At least three feet.)	ms?
Are ground-wires in place for ignitable wastes?(Note condition of wires as well.)	
Is there evidence of spilled material?	
If there was a spill, list remedial action taken:	
(Example: Spill was cleaned and leaking drum was replaced	.)
Are drum labeling requirements satisfied?(Each container in the hazardous waste storage area must be	be labeled with the following information.)
EPA Label	DOT Hazard Label
HAZARDOUS WASTE -Federal Law Prohibits Improper Disposal. If found, contact the nearest police or public safety authority or the U.S. Environmental Protection Agency.	CLASS 3
The Generator's Name and Address:	FLAMMABLE LIQUID
Generic Waste Shipping Name:Hazard:	3
Hazard: EPA Waste Code: Date of Containerization:	Florrmetés liquid
Manifest Document Number:	
Additional remarks or actions to be taken:	I

Record this inspection in an inspection log and keep these records for at least three (3) years from the date of inspection.

5. Special requirements for ignitable or reactive waste. § 265.176 -Containers holding ignitable or reactive waste must be located at least 50 feet from the facility's property line. [Comment: See § 265.17(a) for additional requirements.]

General requirements for ignitable, reactive, or incompatible wastes. § 265.17 -(a) The owner or operator must take precautions to prevent accidental ignition or reaction of ignitable or reactive waste. This waste must be separated and protected from sources of ignition or reaction including but not limited to: Open flames, smoking, cutting and welding, hot surfaces, frictional heat, sparks (static, electrical, or mechanical), spontaneous ignition (e.g., from heat-producing chemical reactions), and radiant heat. While ignitable or reactive waste is being handled, the owner or operator must confine smoking and open flame to specially designated locations. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable or reactive waste.

Shops that generate ignitable waste should locate the 90-day storage area to comply with the above requirements. Note that the RI definition of ignitables is more stringent than the federal definition, (Flash point of up to 200 F vs. 140 F.) Generators should also separate the storage area from open flames, sparks, and other sources of ignition. Shops should post "No Smoking" signs in the storage area. Drums containing ignitable wastes must also be electrically grounded.

- 6. Special requirements for incompatible wastes. § 265.177 -(a) Incompatible wastes, or incompatible wastes and materials, must not be placed in the same container, unless § 265.17(b) is complied with. (b) Hazardous waste must not be placed in an unwashed container that previously held an incompatible waste or material, unless § 265.17(b) is complied with. (c) A storage container holding a hazardous waste that is incompatible with any waste or other materials stored nearby in other containers, piles, open tanks, or surface impoundments must be separated from the other materials or protected from them by means of a dike, berm, wall, or other device. [Comment: The purpose of this is to prevent fires, explosions, gaseous emissions, leaching, or other discharge of hazardous waste or hazardous waste constituents which could result from the mixing of incompatible wastes or materials if containers break or leak.]
 - § 265.17 General requirements for ignitable, reactive, or incompatible wastes. (b) Where specifically required by other sections of this part, the treatment, storage, or disposal of ignitable or reactive waste, and the mixture or commingling of incompatible wastes, or incompatible wastes and materials, must be conducted so that it does not: (1) Generate extreme heat or pressure, fire or explosion, or violent reaction; (2) Produce uncontrolled toxic mists, fumes, dusts, or gases in sufficient quantities to threaten human health; (3)

Produce uncontrolled flammable fumes or gases in sufficient quantities to pose a risk of fire or explosions; (4) Damage the structural integrity of the device or facility containing the waste; or (5) Through other like means threaten human health or the environment.

Potentially incompatible materials should be stored separately to comply with this requirement. A list of potentially incompatible materials is included in Appendix B.

7. **Air emission standards. § 265.178** -The owner or operator shall manage all hazardous waste placed in a container in accordance with the applicable requirements of subparts AA, BB, and CC of this part.

Small-quantity generators (less than 2,200 pounds (1000 kilograms) per month) should ensure that waste is stored in DOT-approved containers and that these containers remain closed when not being filled. Large quantity generators greater than 2,200 pounds (1000 kilograms) per month) should refer to the appropriate subpart for more specific requirements.

Note: A hazardous waste generator must package the waste in accordance with DOT requirements as well. They can be found in 49 CFR 172, 173, 178, and 179. These regulations are not reviewed in detail here. Basically, shops must ensure that they are using DOT-approved containers in good condition which are compatible with the material being shipped. There are many training seminars available which detail the specific requirements.

2.3.2 Containment

In addition to the container requirements listed above, if the wastes contain free liquids, the area in which hazardous wastes are stored (the 90-day storage area) must have a secondary containment system which is capable of containing a leak or spill. (If your wastes do not contain free liquids, this is not necessary.) The containment system must be designed and operated as follows:




- 1. A base must underlie the containers which is free of cracks or gaps and is sufficiently impervious to contain leaks, spills, and accumulated precipitation until the collected material is detected and removed;
- 2. The base must be sloped or the containment system must be otherwise designed and operated to drain and remove liquids resulting from leaks, spills, or precipitation, unless the containers are elevated or are otherwise protected from contact with accumulated liquids;
- The containment system must have sufficient capacity to contain 10% of the volume of containers or the volume of the largest container, whichever is greater. Containers that do not contain free liquids need not be considered in this determination;
- 4. Run-on into the containment system must be prevented unless the collection system has sufficient excess capacity in addition to that required in #3 above to contain any run-on which might enter the system; and
- 5. Spilled or leaked waste and accumulated precipitation must be removed from the sump or collection area in as timely a manner as is necessary to prevent overflow of the collection system. (If the collected material is a hazardous waste, it must be managed as a hazardous waste in accordance with all applicable requirements.)

Generators should immediately purchase and/or construct a containment system, if needed, in accordance with the requirements listed above. Note that commercially available storage lockers are available which should comply with these requirements. Included in Appendix A is a list of locker manufacturers.

(Note that floor drains that discharge to the subsurface (underground through a drywell, galley, or other means) are prohibited in hazardous waste storage areas.)

Figure 1 on the following page provides a summary of hazardous waste storage requirements.

Figure 1: Summary of Hazardous Waste Storage Requirements

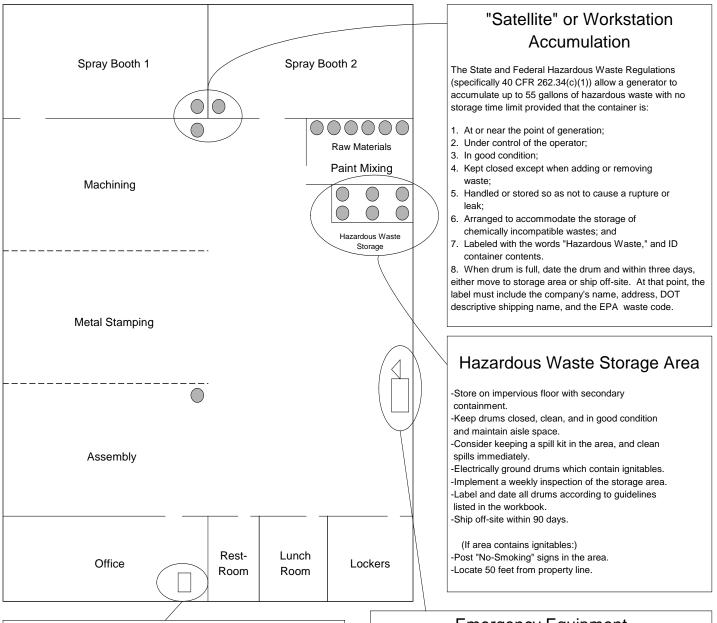

Recordkeeping

Keep copies of manifests, land disposal restriction forms, storage area inspections, employee training records, waste analyses, and biennial reports.

Emergency Equipment

Your facility must be maintained to minimize the possibility of a fire, explosion, or unplanned release of hazardous waste. Fire extinguishers, alarm systems, telephones, spill kits and other emergency equipment is required.

2.4 Waste Storage - Tank Systems

If your facility uses tank systems to store or treat hazardous wastes, there are special requirements for these tanks that are found in 40 CFR 265 Subpart J. These requirements do **not** apply if the tank holds waste that does **not** contain free liquids and the tank is located inside a building with



an impervious floor. Also, generators of less than 1000 kg/month of hazardous waste that are accumulating hazardous waste in tanks, that also do not accumulate over 3000 kg on site at any time (90-day maximum storage), and that do not exceed the limits regarding generation of acute hazardous waste (set out in 40 CFR 261.5 (e) (1) and (2)), shall not be subject to 40 CFR 265, Subpart J (Tank Systems), *except* for 40 CFR 265.201.

Tanks can be of any size, but the waste must be removed every 90 days and facilities must comply with the following:

- 1. Each tank (existing or new) must be certified by a registered professional engineer with respect to design and installation of the tank and its components. This certification must be in the form of a written assessment kept on file at your facility which contains items such as the design standards by which the equipment was/will be constructed, the characteristics of the wastes stored, corrosion protection measures (if in contact with soil or water), foundation load bearing capacity, and tank tightness. Full provisions can be found in 40 CFR 265 Subpart J.
- 2. The tank must be clearly marked with the words "Hazardous Waste," the contents of the tank and its associated hazard, and the accumulation start date.
- 3. The tank must not be used to store hazardous waste if it may cause a rupture, leak, corrosion, or otherwise cause the tank to fail.
- 4. Tanks must have secondary containment equivalent to 100% of the tank volume.

- 5. The tank must be covered or have at least 2 feet of freeboard (space at the top of the tank) in uncovered tanks.
- 6. The tanks system must have equipment such as; valves to provide automatic feed cutoff should a problem occur and for overfill protection; automatic leak detection equipment in secondary containment systems or double-walled tanks, and; alarms to notify personnel.
- 7. The tank and equipment must be inspected **each operating day** for leaks and proper operation of emergency equipment. A log must be maintained in the company records.
- 8. Use the National Fire Protection Association (NFPA) buffer zone requirements for tanks containing ignatable or reactive wastes. Call your local fire department if you need help.


2.5 Container Labeling Requirements

Each container in the hazardous waste storage area must be labeled with the following information:

- 1. The words: "HAZARDOUS WASTE Federal Law Prohibits Improper Disposal. If found, contact the nearest police or public safety authority or the U.S. Environmental Protection Agency."
- 2. The generator's name and address of generating facility.
- 3. The USDOT shipping name and the generic names of the principal hazardous waste components (if the proper USDOT shipping name is not conclusive in identifying the hazardous waste).
- 4. The EPA or Rhode I sland waste code.
- 5. Date of containerization. (The date that the 90 day "clock" begins ticking.) The accumulation start date is the date that hazardous waste first begins accumulating in a container or tank, exclusive of satellite accumulation.

- 6. The hazardous waste manifest document number (prior to being shipped off-site) .
- 7. DOT hazard label.

HAZARDOUS WASTE -Federal Law Prohibits Improper Disposal. If found, contact the nearest police or public safety authority or the U.S. Environmental Protection Agency.
The Generator's Name and Address:
Generic Waste Shipping Name:
Hazard:
EPA Waste Code:
Date of Containerization:
Manifest Document Number:



EPA Label

DOT Hazard Label

These labels are readily available from lab safety catalogs or from your waste transporter. DOT hazard labels depend on the material in the container. A full list of hazard labels can be found in Appendix C.

Each "Satellite" Accumulation container must be labeled with the words "Hazardous Waste," and other words that identify the contents of the container. However, if the container is ultimately moved to the storage area to become the shipping container, then it must have all of the items listed above (the company's name, address, DOT descriptive shipping name, and the EPA waste code) when in the 90-day accumulation area.


The hazardous waste generator is also responsible to ensure that the vehicle transporting its hazardous waste is licensed in RI and has the correct placards. Placards are similar in shape and color to the hazard labels, but are larger and must be on all four sides of the vehicle. If the vehicle does not have the correct placards, it is the



Placard

generator's responsibility to placard the truck correctly, though this generally is not necessary with competent waste transporters.

2.6 Offering Hazardous Waste for Shipment – Licensed Transporters, EPA ID Numbers and Waste Manifests



You will need a licensed hazardous waste transporter to remove your hazardous waste. Your transporter will provide you with a manifest for each shipment, which may be preprinted, except for your signature. Make sure you check the manifest for accuracy with regard to your EPA I D number, amount and type of wastes. You, as the generator, will be held responsible for any errors contained on the manifest. A list of licensed RI Waste Transporters is included in Appendix D. Also, an updated list can always be found at DEM's web site (www.state.ri.us/dem)

EPA Identification Numbers and Authorized Agents

Generators must not store, or offer for transportation, hazardous waste without having received an EPA identification number (Rule 5.01). Shops also must not offer its hazardous waste to transporters or to treatment, storage, or disposal facilities that have not received an EPA identification number, and the transporter must have a valid RI Hazardous Waste Transporter Permit as indicated by an official sticker on the vehicle. To obtain an EPA ID Number, contact DEM at (401) 222-1360 and indicate that you are requesting an EPA ID Number for Hazardous Waste Generation.

A generator must submit to DEM the names and signatures of all agents of the generator authorized to sign the manifest (Rule 5.09). If authorized agents change, this information must also be submitted.

Hazardous Waste Manifests/Waste Shipment

A manifest is an eight-copy document designed to track the hazardous waste shipment. Rhode I sland's manifest is shown in Figure 2. If the state to which the shipment is manifested (consignment state) supplies the manifest and requires its use, then the generator must use that manifest. If the consignment state does not supply the manifest, then the generator must use Rhode I sland's manifest. (The manifest contains the same basic information despite the state from which it originates.) As stated previously, it is the

generator's responsibility to make sure that the manifest is accurate, even if it is filled out by the transporter for you.

Rule 5.03 of the RI Regulations deals with hazardous waste shipment. At shipment, you must sign the manifest and keep copy 8. Copies 6 and 7 must then be mailed to RI DEM and the state receiving the waste (if RI, then to DEM also) respectively within 5 days. (Some transporters will mail copies 6 and 7 for you.) The facility receiving your waste will send you a signed Copy 3 of the manifest within 35 days. Staple copies 3 and 8 together and keep in your records for three years.

If Copy 3 is not received within 35 days, you <u>must</u> file an exception report with the Department. Contact DEM's Office of Waste Management at (401) 222-2797 for guidance.

Note that a generator sending or receiving waste to or from a foreign country shall comply with 40 CFR 262 Subpart E or 40 CFR 262 Subpart F. A generator shipping wastes via water or rail must comply with the provisions of 40 CFR 262.23 (c) or (d) and 40 CFR 263.20 (e) or (f).

-	DEPARTMENT OF EN	E OF RHODE ISLAND IVIRONMENTAL MANAGEM Waste Nanifest Section Street, Providence, fil 62508 605/277-2797		met ONG No	2000-0000		
V	UNIFORM HAZARDOUS	A 10 No Marriest potent No	2. Page 1	200.00	der or the sky	Elia, bill	10
ŀ	WASTE MANIFEST Generality Name and Maring Address	ARCHARACTURE CONTRACTOR	A State Ma	WARZ Doo.	priors Nam	ber	
1	TENERAL DENDE STATE OF STATE		RI H	0005	328		
ı	Generator a Phone (B. Generat	prisite Aux	1955		
	Transporter 1 Company Name 4	US EPA ID Number	C. State Tro	egiror fit	Joint Plan		
ŀ	Transporter 2 Company Name A	US EPA ID Number	D Trenspo	deca Phon			
ŀ	Designated Facility Name and Sire Address 10	LiS EPA ID Number	E. there the	reporter 100	Joine Plan		
1	The state of the s	D. D. H. D. H. H. L.	F. Tristapo				310
1	The state of the s		G. Facility N	1,700	96	1	
1	11: US DOT Description shokeling Proper Shipping Name: Hazard	Class and 10 Muniford	ainers	13:	(4) Unio	1	1
1	The second secon	No.		Total	W Vot	Wester N	0_
		REAL PROPERTY.			211		
ŀ				P. Cal			
		Residence of	1		可源		
1		B. ST. B. D. ST.				r-li-	H
ł		E-145-34-5	194		474		
diam'r.	Accessoral Descriptions for Materials Listed Absorp		K. Handirig	Cones las	Wasten Lo		ne nai
1			8		E		
1			11.		4	4	
1	5 Special Handling Instructions and Adoptional Information	Louis College	170	= 1			
-	GENERATOR'S CERTIFICATION: I haven skelars that the care next are classified, packed, marked, and labeled and all reterratorial and national generatorial regulators. #I am a large quartity generator, I confly that I have a program determined to be economically placeable motified if yourseld in breast to be economically placeable motified if yourseld to be an about 12 break walls management method that is available to me and that Printed/Typed Name	in all respects in proper condition in place to reduce the tolarne or tenage, or dispress customly assist parity, I have truck upon both of	n ha manapa nd humby at v at the former of	to by highway to be to b	se accordent saled to the less the pain perendice	dognie i sort aid	Nive
	17 Transporter 1 Asknowledgement of Receipt of Materials		FOR		20	Date	
	Printed Typed Name	Signature	1965		Mar	Day	For
	18 Transporter 2 Acknowledgement or Receipt of Materials			515		Date	
	Printed Typed Name	Signature	DELLE .	H.H.	Mari	Dar	Yes
The state of the s	19. Discrepancy Indication Space						
ΔĒ	20 Facility Owner or Operator Certification of receipt of nazard	our materials covered by this in	an heur moe	n se nates	Com	4	
	hen 19					Own	

Copy 1: Facility Mails To Destination State

Figure 2: RI Hazardous Waste Manifest

Land Disposal Restrictions

Land disposal restrictions (LDR) provide a second measure of protection from threats posed by hazardous waste disposal. LDR provides that a hazardous waste cannot be placed on the land until the waste is treated (or meets specific treatment standards) to reduce the mobility or toxicity of the hazardous constituents in the waste. Once listed or identified, a hazardous waste becomes restricted (or subject to LDR), when the Agency establishes treatment standards that the waste must meet before it can be land disposed.

EPA requires generators managing wastes that are subject to LDR (restricted wastes) to meet certain notification, certification, waste analysis, and recordkeeping requirements under 40 CFR 268.7. Much like a hazardous waste manifest, the LDR notification and certification paperwork helps hazardous waste handlers and EPA enforcers ensure that wastes are properly managed. A notification accompanies the initial shipment of each waste that is subject to LDR and includes such information as the waste code(s), the hazardous constituents present in the waste, and waste analysis data. EPA requires subsequent notification only when the waste or the receiving facility changes. Additionally, if a waste can be land disposed without further treatment, a certification to that effect must accompany the notification. EPA requires waste handlers to retain such paperwork in order to track wastes that are subject to LDR and to ensure that those wastes receive proper treatment prior to disposal.

Section 268.7(a) contains the tracking requirements for generators, §268.7(b) specifies the requirements for treatment facilities, §268.7(c) contains the regulations applicable to disposal facilities, §268.7(d) contains special notification and certification requirements that apply to hazardous debris, and §268.7(e) contains special notification requirements for contaminated soil.

Generators must determine if their hazardous waste is subject to LDR at the point of generation. They may make this determination by testing or applying knowledge. If a waste is subject to LDR and does not meet applicable treatment standards, generators must notify the treatment facility in writing

(§268.7(a)(2)). This notice accompanies the manifest and must include the following information:

- EPA hazardous waste code(s)
- I dentification of the waste as a wastewater or nonwastewater
- · Manifest number associated with the waste shipment
- Waste analysis data (if available)
- For characteristic wastes, any additional hazardous constituents present
- When hazardous debris is to be treated by an alternative technology under §268.45, a statement to that effect and the contaminants subject to treatment
- For contaminated soil, a list of the constituents subject to treatment and a statement that the soil does or does not meet LDR standards.

If a generator's waste already meets applicable treatment standards, the generator, in accordance with §268.7(a)(3), must submit a signed certification stating that the waste meets the applicable treatment standards. This certification accompanies a copy of the notification statement described above.

2.7 Emergency Preparedness and Prevention/Contingency Plans



Equipment Required

Your facility must be maintained in order to minimize the possibility of a fire, explosion, or unplanned release of hazardous waste constituents. Your facility must have the following:

1. An internal communications or alarm system capable of providing immediate emergency instruction (voice or signal) to facility personnel.



2. A device, such as a telephone (immediately available at the scene of operations) or a hand-held two-way radio, capable of summoning emergency assistance from local police and fire departments.



3. Portable fire extinguishers, fire control equipment (including special extinguishing equipment, such as that using foam, inert gas, or dry chemicals), spill control equipment, and decontamination equipment.



4. Water at adequate volume and pressure to supply water hose streams, or foam producing equipment, or automatic sprinklers, or water spray systems. (Adequate water pressure can be determined during the annual sprinkler test required by OSHA and local fire departments.)



- 5. All facility communications or alarm systems, fire protection equipment, spill control equipment, and decontamination equipment, where required, must be tested and maintained as necessary to assure its proper operation in time of emergency.
- 6. Whenever hazardous waste is being poured, mixed, spread, or otherwise handled, all personnel involved in the operation must have immediate access to an internal alarm or emergency communication device, either directly or through visual or voice contact with another employee.



- 7. The owner or operator must maintain aisle space to allow the unobstructed movement of personnel, fire protection equipment, spill control equipment, and decontamination equipment to any area of facility operation in an emergency, unless aisle space is not needed for any of these purposes.
- 8. The owner or operator must attempt to make arrangements to familiarize local police, fire departments, and emergency response teams with the layout of the facility, properties of hazardous waste handled at the facility and associated



hazards, places where facility personnel would normally be working, and possible evacuation routes. (Note: Where more than one police and fire department might respond to an emergency, agreements designating primary emergency authority to a specific police and a specific fire department, and agreements with any others to provide support to the primary emergency authority should be obtained.)

- 9. The owner or operator must attempt to make arrangements to familiarize local hospitals with the properties of hazardous waste handled at the facility and the types of injuries or illnesses which could result from fires, explosions, or releases at the facility.
- 10. With regard to #8 and #9, where State or local authorities decline to enter into such arrangements, the owner or operator must document the refusal in the operating record of the facility.

Written Contingency Plan

Each facility must have a written contingency plan designed to minimize hazards to human health or the environment from fires, explosions, or any unplanned release of hazardous waste to air, soil, or surface water. The plan should outline specific steps that company personnel will take in response to emergencies. To help generators develop their contingency plans, a guidance document with fill-in sections has been included in Appendix E. Once developed, this plan is required to be submitted to local emergency response providers. Should the response providers be unwilling to make arrangements with you, document this in the operating record of the facility.

In the development of this plan, you should consider designating an emergency coordinator. Should an emergency situation arise, the emergency coordinator must be prepared to act quickly to protect employees, emergency response personnel, and the environment. Also, evacuation routes should be posted along with exit signs in areas where hazardous wastes are handled or stored.

2.8 Annual Personnel Training

Personnel dealing with hazardous waste at the facility of a generator engaging in 90-day accumulation must successfully complete a program of classroom



instruction or on-the-job training that teaches them hazardous waste management procedures (including contingency plan implementation) relevant to the positions in which they are employed. The program must be directed

by a person already trained in hazardous waste management procedures, and must include instruction which teaches employees dealing with hazardous waste the following:

- Knowledge of what a hazardous waste is;
- Knowledge of which wastes are hazardous at the facility;
- Management procedures which include all applicable types of hazardous waste storage and accumulation;
- Labeling;
- Accumulation start dates;
- Storage area inspections;
- Manifesting;
- Preparedness and prevention, and;
- Contingency plan implementation.

The training program must also be designed to ensure that facility personnel are able to respond effectively to emergencies by familiarizing them with emergency procedures, emergency equipment, and emergency systems, including:

- 1. Procedures for using, inspecting, repairing, and replacing facility emergency and monitoring equipment;
- Communications or alarm systems;
- 3. Response to fires or explosions;
- 4. Response to groundwater contamination incidents;
- 5. Operation of any waste feed cut-off systems, and;
- 6. Shutdown of operations.

Facility personnel must successfully complete the program within six months after the date of their employment or assignment to the facility, or to a new position at the facility, whichever is later. Employees must not work in unsupervised positions until they have completed the training requirements. In addition, facility personnel must take part in an annual review of the initial training. With regard to this training, the generator must maintain the following documents and records at the facility:

- 1. The job title for each position at the facility related to hazardous waste management, and the name of the employee filling each job;
- 2. A written job description for each position;

- 3. A written description of the type and amount of both introductory and continuing training that will be given to each person filling a position.
- 4. Records that document that the training or job experience required has been given to, and completed by, facility personnel.

Training records on current personnel must be kept until closure of the facility. Training records on former employees must be kept for at least three years from the date the employee last worked at the facility. Personnel training records may accompany personnel transferred within the same company.

In order to comply with these requirements, and depending on given facility situations, the generator may also be obligated to ensure that employees are also trained pursuant to Title 29 (OSHA) of the Code of Federal Regulations for emergency hazardous waste and/or hazardous material handling and exposure (HAZWOPER). Be advised that USEPA Hazardous Waste Training and OSHA HAZWOPER Training, although similar and complementary, are **not** considered equivalent and may **not** be mutually substituted.

2.9 Recordkeeping and Reporting

Generators of hazardous waste need to record the following:

- 1. A generator must keep a copy of each signed manifest for three years, including a signed copy from the designated facility which received the waste. This signed copy must be retained as a record for at least three years from the date the waste was accepted by the initial transporter. (LDRs must be kept for five years)
- 2. A generator who does not receive a copy of the manifest with the handwritten signature of the owner or operator of the designated facility within 35 days of the date the waste was accepted by the initial transporter must contact the transporter and/or the owner or operator of the designated facility to determine the status of the hazardous waste. If the generator has not received a copy of the manifest with the handwritten signature of the owner or operator of the designated facility

within 45 days of the date the waste was accepted by the initial transporter, the generator must file an Exception Report with the RI DEM. The Exception Report must include:

- (i) A legible copy of the manifest for which the generator does not have confirmation of delivery;
- (ii) A cover letter signed by the generator or his authorized representative explaining the efforts taken to locate the hazardous waste and the results of those efforts.

Copies of Exception Reports must be kept for three years.

- 3. A generator must keep records of any test results, waste analyses, or other determinations made in accordance with its identification of hazardous waste for at least three years from the date that the waste was last sent to an on-site or off-site treatment, storage, or disposal facility.
- 4. Each even-numbered year, RI DEM sends a Biennial Report to be filled out by generators. The report requests information such as:
 - -The EPA identification number, name, and address of the generator.
 - -The EPA identification number, name, and address for each off-site treatment, storage, or disposal facility in the United States to which waste was shipped during the year.
 - -The name and EPA identification number of each transporter used during the reporting year for shipments to a treatment, storage or disposal facility within the United States.
 - -A description, EPA hazardous waste number (from 40 CFR part 261, subpart C or D), DOT hazard class, and quantity of each hazardous waste shipped off-site for shipments to a treatment, storage or disposal facility within the United States.
 - -A description of the efforts undertaken during the year to reduce the volume and toxicity of waste generated.

-A description of the changes in volume and toxicity of waste actually achieved during the year in comparison to previous years.

A generator must keep a copy of each Biennial Report for a period of at least three years from the due date of the report.

5. Spill Reporting

In the event of an actual or <u>threatened</u> spill or release of hazardous waste or material which presents any risk of injury to health or the environment, or during an emergency event where the facility must implement its contingency plan, the generator must notify the Department (401/222-1360), and the National Response Center (800/424-8802) immediately. The generator must also immediately take steps to prevent, contain and/or clean up the spill or release.

After such notification, the generator must note in the operating record of the facility the date, time, and details of the incident, and also must submit a written report on the incident to the Regional EPA Administrator within 15 days of the incident. The report must include:

- 1. Name, address, and telephone number of the owner or operator;
- 2. Name, address, and telephone number of the facility;
- 3. Date, time, and type of incident (e.g., fire, explosion);
- 4. Name and quantity of material(s) involved;
- 5. The extent of injuries, if any;
- 6. An assessment of actual or potential hazards to human health or the environment, where this is applicable, and;
- 7. Estimated quantity and disposition of recovered material that resulted from the incident.

3.0 Hazardous Waste Self-Audit Checklist

1.	Does your facility generate hazardous wastes? [See Section 2.1 (pg. 10) of the workbook.] If no, then the state and federal hazardous waste regulations do not app	☐ Yes ☐ No oly to your
	current operations, but may apply in the future.	
2.	What is your facility's hazardous waste identification number? [If you do not currently have one, refer to Section 2.6 (pg. 27) of the workbook.]	#
3.	How much hazardous waste did you ship from your facility in the last 12 months?	gallons
4.	Do you have appropriate documentation which shows where hazardous waste is being shipped? [See Section 2.6 (pg. 27) and Section 2.9 (pg. 35) of the workbook.]	□ Yes □ No
5.	Is all hazardous waste stored in either a satellite accumulation area and/or a separate hazardous waste storage area? [See Section 2.2 (pg. 15) of the workbook.]	☐ Yes ☐ No
	[See Seedon 2.2 (pg. 13) of the workbook.]	— 105 — 110
6.	Regarding the satellite accumulation area: [See Section 2.2 (pg. 15) of the wa) Is the area clearly marked and the container properly labeled? b) Is the container under the control of an operator at or	orkbook.] □ Yes □ No
	near the point of generation?	☐ Yes ☐ No
7.	Regarding the hazardous waste storage area: [See Section 2.3 (pg. 17) of the	e workbook.]
	a) Are all containers in good condition?	☐ Yes ☐ No
	b) Are containers labeled with the words "Hazardous Waste?"	☐ Yes ☐ No
	c) Are containers labeled with name of the waste, and its waste code?	☐ Yes ☐ No
	d) Are containers labeled with the hazard classification?e) Are containers labeled with the date that it was placed	☐ Yes ☐ No
	in the storage area?	☐ Yes ☐ No
	f) Is the area itself secure and protected from stormwater?	☐ Yes ☐ No
	g) Is there adequate aisle space between drums?	☐ Yes ☐ No
8.	Does your hazardous waste storage area meet the criteria for	
	secondary containment? [See Section 2.3.2 (pg. 21) of the workbook.]	☐ Yes ☐ No
9.	Is the area inspected weekly for signs of spills or container	
	deterioration, and is this inspection documented?	
	[See Section 2.3 (pg. 17) of the workbook.]	☐ Yes ☐ No
10.	Are you shipping your hazardous waste off-site	_
	within 90 days of generation? [See Section 2.2 (pg. 15) of the workbook.]	☐ Yes ☐ No

11.	If the storage area contains ignitables: [See Section 2.3 (pg. 17) of the workb	ook.]	
	a) Is it located 50 feet from the property line?	☐ Yes ☐ No)
	b) Is the area separated from sources of ignition?	☐ Yes ☐ No)
	c) Are "No Smoking" signs posted in the area?	☐ Yes ☐ No	
	c) The Two billioning bigins posted in the dreat.	— 105 — 1 10	
12.	Does your shop contain and maintain emergency equipment designed to possibility of an explosion, fire, or unplanned release of hazardous material provisions are contained in Section 2.7 (pg. 31) of the workbook.]		
13.	Does your shop have a written contingency plan designed to minimize associated with the possibility of an explosion, fire, or unplanned relea materials? [Full provisions are contained in Section 2.7 (pg. 31) of the workbook.]	se of hazardo	
14.	Has this plan been submitted to local emergency response providers? [Full provisions are contained in Section 2.7 (pg. 31) of the workbook.]	☐ Yes ☐ No)
15.	Does your shop have an employee training program that teaches them waste management procedures including contingency plan implementation [Full provisions are contained in Section 2.7 (pg. 31) of the workbook.]		
16.	Does your shop have records indicating that an employee training progoccurring? [See Section 2.8 (pg. 33) and 2.9 (pg. 35) of the workbook]	gram is Yes No)
17.	If tanks are used for hazardous waste storage, are you in compliance w storage and inspection requirements listed in Section 2.4 (pg. 24)	ith the tank ☐ Yes ☐ No	O
18.	Are your manifests, waste analyses, and other hazardous waste manage maintained on-site and available for inspection? [See Section 2.9 (pg. 35) of the workbook]	ement records	
19.	Have you submitted to the Department the names and signatures of aut that can sign the manifest? [See Section 2.6 (pg. 27) of the workbook]	horized agen Yes No	

4.0 Important Phone Numbers for Hazardous Waste Issues

Rhode I sland Department of Environmental Management

235 Promenade Street

Providence, RI 02908

(401) 222-4700	Central Information
222-6822	Office of Technical and Customer Assistance
222-3070	24-hour emergency number
222-1360	Office of Compliance and Inspection -EPA ID numbers
222-1360	Office of Compliance and Inspection -Aboveground Tanks
222-2797	Office of Waste Management
222-2797	Office of Waste Management -Underground Tanks
222-6820	Office of Water Resources -Wetland and ISDS Permitting
222-2771	DEM Ombudsman

Website: www.state.ri.us/dem

U.S. Environmental Protection Agency New England Region JFK Federal Building Boston, MA 02203 (617) 918-1111

U.S. Department of Transportation Hotline (202) 426-2075

U.S. Department of Transportation Federal Highway Division 380 Westminster Mall Providence, RI 02903 (401) 528-4541

RI Department of Health, OSHA Consultative Services (401) 222-2438

RCRA/Superfund Hotline 1-800-424-9346

EPA Small Business Ombudsman Hotline 1-800-932-1000

U.S. Government Printing Office (617) 720-4180

Appendix A- Commercial Hazardous Waste Storage Lockers

Gilmore-Kramer Company
50 Sprague Street
Fax: (401) 331-4149
Fax: (401) 421-5679

Haz-Mat Containment Corporation
511 Wilbur Avenue, Bldg. B
Antioch, CA 94509

Telephone: (800) 943-6510
Fax: (925) 776-1606
Website: www.haz-mat.net
E-mail: sales@haz-mat.net

Hazmat Storage Containers Telephone: (800) 314-8719 1025 South Linwood Avenue Fax: (714) 542-6338

Santa Ana, CA 92705 Website: www.hazmatstorage.com
E-mail: HSC@hazmatstorage.com

HAZ-STOR
2454 Dempster Street
Des Plaines, IL 60016
E-mail:

Telephone: (800) 727-2067

(847) 298-9716

Website: www.hazstor.com
hazstor@pop.net

Safety Storage, Inc. Telephone: (831) 637-5955 2301 Bert Drive Fax: (831) 637-7405

Hollister, CA 95023 Website: www.safetystorage.com E-mail: info@safetystorage.com

Note: This report is intended as advisory guidance only in developing approaches for pollution prevention and environmental compliance. Any and all products and companies identified (through the manufacturer's supplied product literature) in this report are for example only. No endorsements are implied nor should any be inferred. The Office of Technical and Customer Assistance advises that prior to implementation of any suggestion or recommendation, the company should consult with proper Federal, State, and Local regulatory agencies.

Appendix B- EXAMPLES OF POTENTIALLY INCOMPATIBLE WASTE

(APPENDIX V TO 40 CFR PART 265)

Many hazardous wastes, when mixed with other waste or materials at a hazardous waste facility, can produce effects which are harmful to human health and the environment, such as (1) heat or pressure, (2) fire or explosion, (3) violent reaction, (4) toxic dusts, mists, fumes, or gases, or (5) flammable fumes or gases. Below are examples of potentially incompatible wastes, waste components, and materials, along with the harmful consequences which result from mixing materials in one group with materials in another group. The list is intended as a guide to owners or operators of treatment, storage, and disposal facilities, and to enforcement and permit-granting officials, to indicate the need for special precautions when managing these potentially incompatible waste materials or components. This list is not intended to be exhaustive. An owner or operator must, as the regulations require, adequately analyze their wastes so that they can avoid creating uncontrolled substances or reactions of the type listed below, whether the wastes are listed below or not. It is possible for potentially incompatible wastes to be mixed in a way that precludes a reaction (e.g., adding acid to water rather than water to acid) or that neutralizes them (e.g., a strong acid mixed with a strong base), or that controls substances produced (e.g., by generating flammable gases in a closed tank equipped so that ignition cannot occur, and burning the gases in an incinerator). In the lists below, the mixing of a Group A material with a Group B material may have the potential consequence as noted.

Crown 1 A	Croup 1 D				
Group 1–A	Group 1–B				
Acetylene sludge	Acid sludge				
Akaline caustic liquids	Acid and water				
Alkaline cleaner	Battery acid				
Alkaline corrosive liquids	Chemical cleaners				
Alkaline corrosive battery fluid	Electrolyte, acid				
Caustic wastewater	Etching acid liquid				
	or solvent				
Lime sludge and other corrosive					
alkalines					
Lime wastewater	Pickling liquor				
and other corrosive acids	81				
Lime and water	Spent acid				
Spent caustic	Spent mixed acid				
Spent edustic	Spent sulfuric acid				
	Spent surraire dela				
Potential consequences	Haat ganaration:				
Potential consequences:					
violent reac	violent reaction.				

Group 2–A

Aluminum

Any waste in

Group 1–A or 1–B

Beryllium

Calcium

Lithium

Magnesium

Magnesium Potassium Sodium Zinc powder

Other reactive metals and metal hydrides

Potential consequences: Fire or explosion; generation of flammable hydrogen gas.

Group 3–A	Group 3–B	
Alcohols	Any concentrated	
	waste in Groups 1–	
	A or 1–B	
Water	Calcium	
	Lithium	
	Metal hydrides	
	Potassium	
	SO_2Cl_2 , $SOCl_2$,	
	PCl3, CH ₃ SiCl ₃	
	Other water-reactive	
	Waste	

Potential consequences: Fire, explosion, or heat generation; generation of flammable or toxic gases.

Group 4–A	Group 4–B
Alcohols	Concentrated Group 1-A or 1–B wastes
Aldehydes	Group 2–A wastes
Halogenated hydrocarbons	-
Nitrated hydrocarbons	
Unsaturated hydrocarbons	
Other reactive organic compoun	ds and
solvents	

Potential consequences: Fire, explosion, or violent reaction.

Group 5–A Group 5–B


Spent cyanide and sulfide solutions Group 1–B wastes

Potential consequences: Generation of toxic hydrogen cyanide or hydrogen sulfide gas.


Group 6–A	Group 6–B		
Chlorates	Acetic acid and		
	other organic acids		
Chlorine	Concentrated mineral		
	acids		
Chlorites	Group 2–A wastes		
Chromic acid	Group 4–A wastes		
Hyphochlorites	Other flammable		
	and combustible		
	wastes		
Nitrates			
Nitric acid, fuming			
Perchlorates			
Permanganates			
Peroxides			
Other strong oxidizers			
Potential consequences: Fire, explosion, or violent reaction.			

SOURCE: "Law, Regulations, and Guidelines for Handling of Hazardous Waste." California Department of Health, February 1975.

Appendix C- DOT Hazard Labels & DOT Hazard Placards

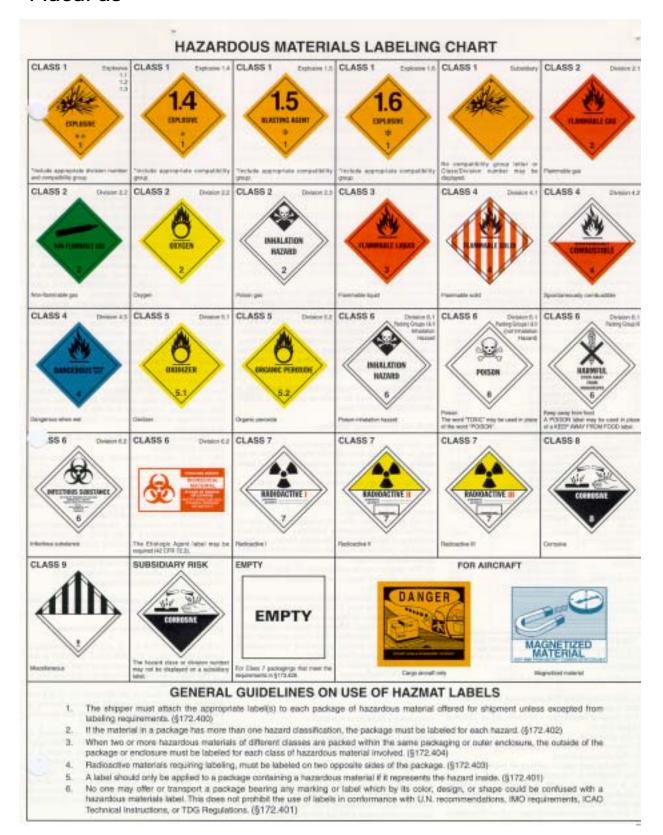

HAZARDOUS MATERIALS PLACARDING CHART

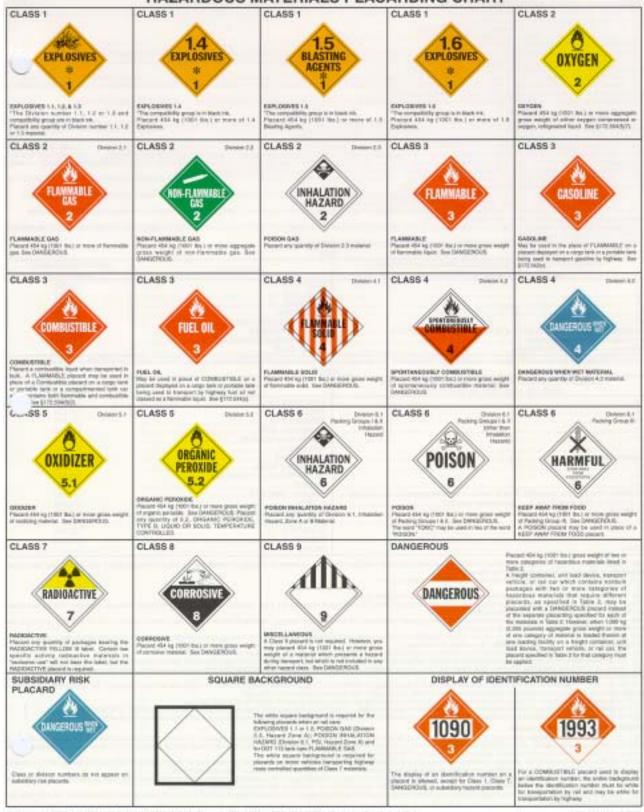

Appendix D- List of Permitted Hazardous Waste Transporters (May, 2000)

Company	EPA ID#	Address	Waste/Service Types (See Key Below Table)	Phone	Permit #
21ST CENTURY ENV MGMT	RID980906986	275 ALLENS AVE, PROVIDENCE, RI, 02905	1-3;5-13	401/781-6340	752
ADVANCED CHEMICAL CO	RID059735761	105 BELLOWS ST, WARWICK, RI, 02888	2,3,5,9	401/785-3434	524
AMERICAN ENV TECH INC	CTD983883745	3 TROWBRIDGE DRIVE, BETHEL, CT, 06801	1	203/744-3477	695
AMERITECH ENV SVS INC	MED981209364	PO BOX 2808, S PORTLAND, ME, 04116	1	207/828-5136	779
ASHLAND CHEMICAL CO	NYD049253719	PO BOX 1300, BINGHAMTON, NY, 13902	1-3;5,6;8-13	607/723-8254	631
ATLANTIC COAST ENV.	CTR000007658	PO BOX 8608, NEW HAVEN, CT, 06531	1	203-469-2776	801
AUCHTER INDUSTRIAL VAC	NJD980772768	4801 SOUTH WOOD AVE, LINDEN, NJ, 07036	1	908/925-1515	729
BFI WASTE SYS OF NO AMER	MAD991302266	ZERO FARLEY ST, LAWRENCE, MA, 01843	9	978/687-2775	523
BUFFALO FUEL CORP	NYD051809952	344 VULCAN STREET, BUFFALO, NY, 14207	1-3;5-8;10-3	716/873-7196	464
BURNHAM SERVICE CO INC	GAD064493000	1630 PHOENIX BLVD, ATLANTA, GA, 30349	3,7,11	770/472-6300	509
CHEM-FREIGHT INC	OHD982061350	395 BAIRD, AKRON, OH, 44311		313/824-5816	810
CLEAN COAST INC.	RID987472545	103 DEXTER ROAD, EAST PROVIDENCE, RI, 02914	1	401/741-2808	799
CLEAN HARBORS	MAD039322250	1501 WASHINGTON ST, BRAINTREE, MA, 02184	1	781/849-1800	387
CLEAN VENTURE	NJ0000027193	201 SOUTH FIRST ST, ELIZABETH, NJ, 07206	1	908/355-5800	740
CONNECTICUT WASTE OIL INC	CTD018844050	PO BOX 179, MERIDEN, CT, 06450	1,2,6,8,10,	203/235-8889	610
CW MILLER COMPANY	RID063908974	1 HODSELL STREET, CRANSTON, RI, 02910	1-3;5-13	401/461-7330	303
CYCLE SOLVE	RID982194987	167 MILL STREET, CRANSTON, RI, 02905	1,2,8,12	401/781-0808	583
CYN OIL CORP	MAD082303777	PO BOX 119, STOUGHTON, MA, 02072	1,4,12,13	617/341-5108	315
D-TOX INC	CTR000008151	60 EZRA SILVA LANE, WINDSOR, CT, 06095	1	860/683-8895	751
DART TRUCKING CO INC	OHD009865825	PO BOX 89, CANFIELD, OH, 44406	1,3,5-7;10-	330/533-9841	536
ECOLOGY RECOVERY SYSTEMS	MAR000008375	330 TACOMA ST #4, WORCESTER, MA, 01605	1	508/852-8451	772
ELDREDGE INC	PAD014146179	898 FERNHILL RD, WEST CHESTER, PA, 19380	2,3,5-13	610/436-4749	521
ELECTRONIC ENVIRONMENTS	MP5084734339	60 SHAWMUT ROAD, CANTON, MA, 02021	12	781/302-2724	809
ENPRO SERVICES INC	MAD980670004	12 MULLIKEN WAY, NEWBURYPORT, MA, 01950	1	978/465-1595	507
ENVIRO-SAFE CORPORATION	MAD985269323	PO BOX 810, EAST SANDWICH, MA, 02537	1-4;6-13	508/888-5478	676
ENVIRITE OF PENNSYLVANIA	PAD010154045	730 VOGELSONG ROAD, YORK, PA, 17404	1	717/849-1900	774
ENVIRONMENTAL MAINT. SVCS	CTR000003939	PO BOX 7318, PROSPECT, CT, 06712	1	203/758-5550	785
ENVIRONMENTAL PROD & SVS	NYD980761191	PO BOX 315, SYRACUSE, NY, 13209	1	315/471-0503	600
ENVIRONMENTAL SVS INC	CTD018810802	90 BROOKFIELD ST, SOUTH WINDSOR, CT, 06074	1	860/528-9500	792
ENVIRONMENTAL TRANSPORT	NJD000692061	PO BOX 296, FLANDERS, NJ, 07836	1	973/347-8200	424
FLEET ENV SVS INC	MA5000004531	8 HARDING ST.BLDG #2, LAKEVILLE, MA, 02347	1	508/946-6900	619
FM EMERGENCY GENERATION	none	PO BOX 136, CANTON, MA, 02021	12	781-828-0026	800
FRANK CORPORATION	MAD089353023	615 TARKLIN HILL ROA, NEW BEDFORD, MA, 02745	1	508/995-9997	647
FRANKLIN ENV SVS INC	MAD084814136	PO BOX 617, WRENTHAM, MA, 02093	1	508/384-6151	312

Company	EPA ID#	Address	Waste/Service Types (See Key Below Table)	Phone	Permit #
FRANKS VACUUM TRUCK	NYD982792814	4500 ROYAL AVENUE, NIAGARA FALLS, NY, 14303	1-3;5-13	716/284-2132	592
SERV FREEHOLD CARTAGE	NJD054126164	PO BOX 5010, FREEHOLD, NJ, 07728	1-3;5-13	732/462-1001	535
G W OBRIEN INC	MAD985316116	1 PARK AVE, TEWKSBURY, MA, 01876	1	978/970-5955	727
GANNON & SCOTT INC	RID981886104	33 KENNEY DRIVE, CRANSTON, RI, 02920	2,3,5,9	401/463-5550	426
GEIB REFINING CORP	RID095978995	399 KILVERT ST, WARWICK, RI, 02886	9	401/738-8560	438
GENERAL CHEMICAL CORP	MAD019371079	138 LELAND ST, FRAMINGHAM, MA, 01702	1	508/872-5000	360
GLINES & RHODES INC	MAD052629979	PO BOX 2285, ATTLEBORO, MA, 02703	9	508/226-2000	385
HAZMAT ENV GROUP INC	NYD980769947	60 COMMERCE DRIVE, BUFFALO, NY, 14218	1	716/827-7200	512
HORWITH TRUCKS INC	PAD146714878	PO BOX 7/RT 329, NORTHAMPTON, PA, 18067	1-3;5-13	610/261-2220	599
HUBBARD HALL INC	RID075682567	1 NEW ENGLAND WAY, LINCOLN, RI, 02865	1-3;6,8,10-2	401/333-6180	419
INLAND WATERS POLLUTION	MID982606287	2021 S SCHAEFER HWY, DETROIT, MI, 48217	1,3,6-8,10	313/841-5800	468
J B SILVA CO	MAD985273879	61 NICHOLS ST, DANVERS, MA, 01923	9	978-887-7479	633
J PREST ENT INC	NHD51056003	3 WINDING BROOK RD, GOFFSTOWN, NH, 03045	1	603/624-9502	807
J&D TRUCKING INC	NJR000029967	PO BOX 674, NEWFIELD, NJ, 08344	13	856/691-5145	808
JOHN PFROMMER INC	PAD008781072	1320 BEN FRANKLIN HY, DOUGLASSVILLE, PA, 19518	1-3;5-13	610/385-3051	576
JOSEPH FREEDMAN CO	MAD981206774	PO BOX 1889, SPRINGFIELD, MA, 01101	9	413/781-4444	639
KELLEY METALS CORP	RID050322130	115 VALLEY ST, EAST PROVIDENCE, RI, 02914	9	401/434-8795	392
KEYSTONE ENV INC	MAD985278241	100 WEYMOUTH ST, ROCKLAND, MA, 02370	1-10;12,13	781/792-3990	645
KROPP ENV CONTRACTORS	CTR000005488	PO BOX 766, SPRAGUE, CT, 06330	1,4,6-8,10	860/822-1660	804
LACYS EXPRESS INC	NJD046555033	PO BOX 130, PEDRICKTOWN, NJ, 08067	1-3;6-13	609/299-2569	759
LINCOLN ENVIRONMENTAL	RID982192627	333 WASHINGTON, SMITHFIELD, RI, 02917	1	401/232-3353	496
LIQUID CARGO INC	NJD981083603	PO BOX 482, KEARNY, NJ, 07032	3	201/991-7375	684
LRS ENVIRO-SVS INC	NHD500023296	5 BATCHELDER ROAD, SEABROOK, NH, 03874	1	603/474-9266	644
MARISOL INC	NJD002454544	213 WEST UNION AVENU, BOUND BROOK, NJ, 08805	1-3;5,6,8 10	732/469-5100	777
MATLACK INC	DED981110166	1 ROLLINS PLAZA, WILMINGTON, DE, 19899	2,3;5-13	302/426-3101	743
MAUMEE EXPRESS INC	NJD986607380	PO BOX 278, SOMERVILLE, NJ, 08876	1,3,6,8,10-	732/424-8441	702
MCVAC ENVIRONMENTAL	CTR000005058	481 GRAND AVENUE, NEW HAVEN, CT, 06513	1,2,6-8;10-	203/498-1427	678
METAL RECOVERY TRANS CORP	NJR000023325	KBF PLAZA/1 JASPER, PATERSON, NJ, 07522-	2,3,5,6,9,11	973/942-7700	764
METALLIX, INC.	NJD055090815	FOOT OF JERSEY AVE, JERSEY CITY, NJ, 07302	9	201/451-0229	608
METROPOLITAN ENV INC	INT190010397	PO BOX 378, CELINA, OH, 45822	3,6	419/586-6638	805
MODERN TRACTOR & TRUCK	MAR000007195	400 PINE ST, SEEKONK, MA, 02771	1	508/761-5554	749
NAPPI TRUCKING CORP	NJD000813477	151C MORRISTOWN ROAD, MATAWAN, NJ, 07747	1	732/566-3000	545
NARRAGANSETT ELECTRIC CO	RID980911853	280 MELROSE ST, PROVIDENCE, RI, 02901	7,12	401/784-7394	371
NATIONAL ENV SVS INC	MAR000011270	34 WASHINGTON ST, NEWTON, MA, 02458	1	617/243-0233	797
NATIONAL WASTE MGMT INC	MAD985307685	PO BOX 306, MANCHUAG, MA, 01526	9	508/476-1900	765
NEW ENGLAND DISPOSAL TECH	MA5000004002	293 R HARTFORD TRNPK, SHREWSBURY, MA, 01545	1-3;5-13	508/756-1339	781
NORTH COUNTRY ENV SVS INC	MAR000008425	31 GRANITE STREET, MILFORD, MA, 01757	1	508/634-9800	770
NORTHEAST LAMP	CT5000001495	250 MAIN STREET, EAST WINDSOR, CT, 06088	7	860/292-1992	771
OIL ENERGY RECOVERY INC	MAD985294818	PO BOX 492, STOW, MA, 01775	8,12	978/897-6040	710
OIL RECOVERY CORP	MAD985294693	PO BOX 1065, W SPRINGFIELD, MA, 01090	1	413/737-2949	499

Company	EPA ID#	Address	Waste/Service Types (See Key Below Table)	Phone	Permit #
ONYX ENV SVS LLC	NJD080631369	1 EDEN LANE, FLANDERS, NJ, 07836	1	973/691-7321	748
ONYX INDUSTRIES, INC	NY0000260858	2630 BLVD IND, CHAMBLY, QC, J3L4V2	1	514/351-7264	551
OSMOSE INC	NYD002112944	980 ELLICOTT ST, BUFFALO, NY, 14209	13	716/882-5905	553
PAGE ETC INC	NYD986969947	PO BOX 1290, WEEDSPORT, NY, 13166	1,3,7,13	315/834-6681	688
PHILIP SVS/NO ATLANTIC	MED980667950	31 WALDRON WAY, PORTLAND, ME, 04103	1-3;5-13	800/343-0334	783
PRICE TRUCKING CORP	NYD46765574	67 BEACON ST, BUFFALO, NY, 14220	1,3,6-11,13	716/822-1414	474
PROVIDENCE GAS COMPANY	RID007918774	100 WEYBOSSET ST, PROVIDENCE, RI, 02903	367;11-13	401/272-5040	642
R J GUERRERA INC	CTD067080648	PO BOX 700, NAUGATUCK, CT, 06770	1	203/723-7471	479
REPUBLIC ENV SYSTEMS	PAD982661381	21 CHURCH ROAD, HATFIELD, PA, 19440	1-3;5-13	215/997-9116	571
ROBBIE D WOOD	ALD067138891	PO BOX 125, DOLOMITE, AL, 35061	1-3;5-13	205/744-8440	798
S WINDSOR METALLURGICAL	CTR000004481	300 RYE STREET, S WINDSOR, CT, 06074	1,3,6,9	860/291-1432	789
S-J TRANSPORTATION CO	NJD071629976	PO BOX 169, WOODSTOWN, NJ, 08098	1-3;5-13	609/769-2741	377
SAFETY-KLEEN (TG) INC	SCD987474647	1301 GERVAIS ST, COLUMBUS, SC, 29201	1,3;5-13	803/993-4313	656
SAFETY-KLEEN SVS (QUEBEC)	NYD980773675	7305 MARIE-VICTORIN, BROSSARD, QU, J4W1A6	1-3;5-13	450/923-9999	773
SAFETY-KLEEN SYSTEMS, INC	ILD984908202	1 BRINCKMAN WAY, ELGIN, IL, 60123	1-3;6-13	847-697-8460	484
SALESCO SYSTEMS	MA5000002394	5736 W JEFFERSON, PHOENIX, AZ, 85043	1,3,7,12	781/843-1224	720
SERVICE TRANS. GRP., INC	PAR000036236	PO BOX 2132, BRISTOL, PA, 19007	7	215/826-9226	796
SIMONEAU BROS., LLC		2131 PLAINFIELD PIKE, JOHNSTON, RI, 02919	1-4;6-13	401/943-0100	803
SOUTWORTH-MILTON INC.	MAD985294529	100 Quarry Dr., MILTON, MA, 01757	12	508/634-3400	794
ST JOSEPH MOTOR LINES	PAD987358587	PO BOX 5, WOODLAND, PA, 16881	1	814/765-9732	699
STERICYCLE INC	CTD983872698	369 PARK EAST DRIVE, WOONSOCKET, RI, 02895	1,2,9,10	401/769-5800	742
SUPERIOR SPECIAL SVS	MA5000004713	218 CANTON ST, STOUGHTON, MA, 02072	2,3,5,7	781/341-6080	726
TCI INC	NYD986899912	39 FALLS IND PARK RD, HUDSON, NY, 12534	1	518/828-9997	692
THE NDL ORGANIZATION INC	NYD045662921	PO BOX 791, PEEKSKILL, NY, 10566	6	914/737-7200	361
TOTAL RECYCLING SERVICES	NJX000328880	PO BOX 931, RIDGEFIELD, NJ, 07652	10,12	800-943-2023	791
TOTAL WASTE MGMT	NHD980521843	142 RIVER ROAD, NEWINGTON, NH, 03801	1	603/431-2420	653
TRANSPORT ROLLEX LTEE	NYF006000053	910 BOUL LIONEL BOUL, VARENNES, QU, J3X1T6	1	450/652-4282	766
TRI-STATE MOTOR TRANSIT	MOD095038998	PO BOX 113, JOPLIN, MO, 64802	1-3;5-13	417/624-3131	602
TRIAD TRANSPORT INC	OKD981588791	PO BOX 818, MCALESTER, OK, 74502	1	918/426-4751	758
TRIUMVIRATE ENV	MAD985286988	PO BOX 136, BOSTON, MA, 02143	1	617/628-8098	652
TYREE ORGANIZATION LTD	NYD006801245	9 OTIS ST, Westboro, MA, 01581	2,6,8,10,12	508-871-8300	694
UNITED IND SVS	CTD021816889	14 WEST MAIN STREET, MERIDEN, CT, 06451	1,2,4,6,8,10	203/238-6745	590
US BULK TRANSPORT INC	PAD987347515	6286 STERRETTANIA RD, FAIRVIEW, PA, 16415	1,3,7,13	814/838-2558	750
VERNON MILLING CO INC	ALD981023492	PO BOX 1617, VERNON, AL, 35592	1,3,6,7,10-3	205/695-7161	698
WADE SALVAGE	NJD051492445	382 JACKSON RD, ATCO, NJ, 08004	1-3;5-13	609/767-2760	753
WASTE MGMT. OF CT., INC.	CTD983896341	PO BOX 144, PORTLAND, CT, 06480	1-3;5-13	860/342-0667	667
WEAVERTOWN TRANS LEASING	PAD980707442	3866 MILLERS RUN ROA, MACDONALD, PA, 15057	1	724/746-4850	588
WEST CENTRAL ENV CORP	NYD000708271	PO BOX 83, RENSSELAER, NY, 12144	1-3;5-13	518/272-6891	712
WESTERN OIL INC	RI5000009118	389 CHARLES ST, PROVIDENCE, RI, 02904	1	401/454-5870	326
WILLIAM TEOLI	n/a	88 CARRS POND RD., WEST GREENWICH, RI, 02816	antifreeze	401/885-7014	757
WILLS TRUCKING INC	OHD068913409	3185 COLUMBIA ROAD, RICHFIELD, OH, 44286	1,7,13	330/659-9381	597

Company	EPA ID#	Address	Waste/Service Types (See Key Below Table)		Permit #
ZECCO INC	MAD052924495	345 WEST MAIN ST, NORTHBORO, MA, 01532	1	508/393-2537	339

Waste/Service Service Code		Waste/Service Code	Service
1	1 All Hazardous		Petroleum Products With Water
	Waste		
2 Aqueous		9	Precious Metal Solutions
3 Corrosive		10	Solvents
4	Emergency Response	11	Toxics
5 Reactive		12	Waste Oil
6	Flammable	13	Contaminated Soil
7	PCBs		

Appendix E

RHODE I SLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT OFFICE OF COMPLIANCE AND INSPECTION

HAZARDOUS WASTE CONTINGENCY PLAN GUI DANCE

Rule 5.02 (Storage) of the Rhode I sland Rules and Regulations for Hazardous Waste Management requires that all hazardous waste generators prepare a formal written plan outlining specific steps that company personnel will take in response to spills, fires, and explosions or any unplanned release involving hazardous wastes or hazardous waste constituents which could threaten human health or the environment. This rule references 40 CFR 265 Subparts C and D of the Code of Federal Regulations (enclosed). This guidance was developed by the Department to assist companies in developing a good, thorough, and easy-to-read plan for use during an emergency involving hazardous waste. Although contingency plans are site-specific and can be of various levels of detail, this information may be useful as a general guide. Please note that the contingency plan guidance is not necessarily all-inclusive, and that the Department requires that the preparer address all of the items in 40 CFR Subparts C and D.

Please contact the Division of Waste Management at (401) 277-2797 if you have specific questions regarding this guide or any other questions related to hazardous waste management.

INDEX/CONTENTS OF PLAN

- 1. Introduction
- 2. Index
- 3. Emergency Coordinators
- 4. Emergency Procedures
- 5. Emergency Equipment
- 6. Evacuation Routes
- 7. Facility Site Diagram
- 8. Arrangements with Local Authorities

EMERGENCY COORDINATORS

The emergency coordinators listed in this section are authorized to act as on-scene coordinators and to commit the necessary resources during an emergency. At all times, there is at least one coordinator (primary or alternate) either on the company premises or on-call. The coordinators must be familiar with all aspects of the contingency plan, all operations and activities at the company, the locations and characteristics of wastes handled, the location of all company records, and the physical layout of the company. The emergency coordinator will take all reasonable measures to ensure that fires, explosions, and/or releases do not occur, recur, or spread to other areas in the company. These measures shall include, where applicable, stopping processes and operations, collecting and containing released waste, and removing or isolating containers.

The coordinators are as follows:

Primary Coordinator:

Name:

Address:

Phone number (work/ home):

Alternate Coordinator:

Name:

Address:

Phone number (work / home):

Note: Qualifications of the emergency coordinators should be included in a

separate enclosure.

EMERGENCY PROCEDURES

During an emergency, the emergency coordinator shall perform the necessary actions to insure a timely and appropriate response. The coordinator shall choose the order and applicability of the following actions, based upon the situation and the hazardous waste or hazardous waste constituents involved:

- 1. I dentify and assess the situation (source, health, and environmental impact),
- 2. Activate alarm to notify all company personnel,
- 3. Evacuate the company, if necessary,
- 4. Determine action to be taken (e.g. containment, absorption),
- 5. Oversee the cleanup throughout its entirety.
- 6. Within 15 days after the incident, emergency coordinator must submit a written report on the incident to the DEM and Regional EPA Administrator.

Note: Emergency procedures should be a step-by-step, site-specific plan which would be implemented in the event of an emergency. A detailed description of actions to be taken by company personnel during an emergency should be included.

EMERGENCY EQUIPMENT

The following equipment should be found in good condition at the company. Include the physical description and capabilities of each item:

EQUIPMENT PHYSICAL DESCRIPTION AND CAPABILITIES

Alarm system

Communication Systems

Fire Extinguishers

Sprinkler Systems

Spill Control

Personnel Protection

Other

Note: Location of emergency equipment should be indicated on site diagrams.

EVACUATION ROUTES

In the event an emergency arises involving hazardous waste where an evacuation of company personnel becomes necessary, the following evacuation plan would be implemented. Include a description of the signal that would be given to begin evacuation and both primary and secondary evacuation routes personnel would utilize.

Note: Indicate evacuation routes on facility site plan.

FACILITY SITE DIAGRAM

Note: Indicate location of emergency equipment, hazardous waste storage area(s), and both primary and secondary evacuation routes.

Δ	R	R	Δ	Λ	1G	FI	۱Л	F	N	ľΤ	5
$\overline{}$			_		\mathbf{U}		VΙ	_	ıv		_

The following local authorities have be	en sent copies of t	ne contingency plan								
Police										
Fire										
Hospital										
Response Contractor										
Other										
Note: I dentify the primary emergency authority where more than one police or fire department may respond. Describe arrangements agreed to and provide documentation of local authority notifications.										
I have read and understood Emergency Procedures.	l the Continge	ncy Plan and								
Employee's Name (Print)	Signature	Date								